



# Joint sealing cooker

## General information

The joint sealing cooker is used for melting and casting of bituminous hot sealing material.

## Application areas

- Sealing of joints and cracks in asphalt-, concrete-, and pavement surfaces

## Advantages

- Easy handling
- Fast and material saving melting
- Integrated handmixer
- Compact design for a high agility
- Sealing close to the curbstone possible
- Temperature gauge
- Application tool with preheating
- Application tool matches to the road

## Delivery form

Joint sealing cooker with mixer, temperature gauge, 2 application tools ( 3 and 6 cm width), gas bottle holder, gas burner

## Attachments

- Application tool 1,5 cm width
- Sealing slide for curbstones
- Device for scattering
- Seam sealing device
- Stepless temperature control



## Technical data:


types:	20, 30 and 50 liter cooker
temperature display:	dial thermometer
firing:	11 kg propane gas bottle
gas consumption:	0,6 kg (50 l cooker)*
weight:	60 kg without gas bottle (50 Liter)
application rate:	20 l/h   30 l/h   50 l/h

\*per hour at full power (experience value)

## 4-wheel adapter

To improve the stabilization

**NEW**

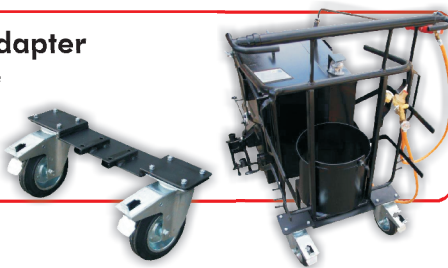

product	Art.Nr.	VPE
Joint sealing cooker 50 l	013392	1 Stück
Joint sealing cooker 30 l	013354	1 Stück
Joint sealing cooker 20 l	0133911	1 Stück



**NEW!**  
GranuGrip than splitt

Edition: 01/2010

The information in this brochure is based on experience and the current state of scientific knowledge and practice. But they are not binding and it is no privity. This device is intended exclusively for joint sealing in road construction.